


LASER **RGB** 3 W

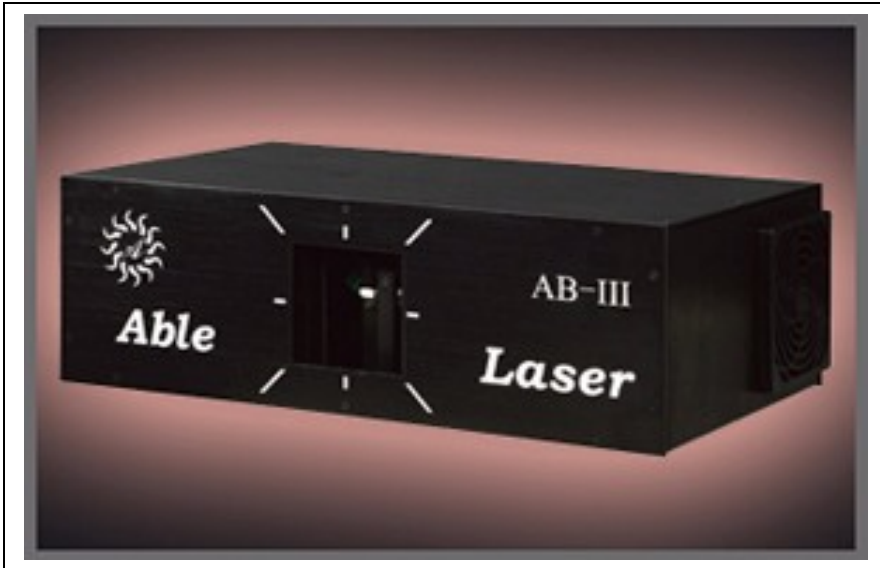

Model □ AB-III

Laser diode: DPSS Semi-conductor

Wavelength: 1 W Red **635nm** / 1 W Green **535nm** / 1 W Blue **473nm**

Color: RGB

Output Power: RGB 3 W

Cooling: Air-cooled / Tec cooler

Analog Modulation: 10 kHz

Expected Life time: 10000hrs

Scan Rate: ILDA 30Kpps

X/Y scan angle: 60°

Interface: RJ45 (Conform to the definition of the standard ILDA DB25 connector)

Applicable software: All software with ILDA signal

Voltage: AC110V-220V 50/60Hz (Auto switch)

Power consumption: 200W

Dimension: 490X340X160mm

Net weight: 18kgs

Gross weight: 30kgs (fly case)

